

PROJECT: LA 24-C-047

SUSTAINMENT FOR
WINNSBORO READINESS CENTER
917 LA-868
WINNSBORO, LA 71295

DRAWING INDEX

SHEET #	SHEET TITLE	DATE
T-101	TITLE PAGE	07.03.25
A-101	SITE PLAN	07.03.25
A-102	DEMO FLOOR PLAN	07.03.25
A-103	DEMO CEILING PLAN	07.03.25
A-104	FLOOR & CEILING PLAN	07.03.25
A-105	CEILING PLAN	07.03.25
A-106	ROOF PLAN	07.03.25
A-201	EXTERIOR ELEVATIONS	07.03.25
A-301	WALL SECTIONS	07.03.25
A-601	ROOM FINISH SCHEDULE	07.03.25
A-602	DOOR SCHEDULE	07.03.25
MD-101	MECHANICAL DEMO PLAN	07.03.25
M-101	MECHANICAL PLAN	07.03.25
M-201	MECHANICAL SCHEDULE	07.03.25
M-301	MECHANICAL DETAILS	07.03.25
P-101	PLUMBING PLAN	07.03.25
ED-100	ELECTRICAL DEMO PLAN	07.03.25
E-101	ELECTRICAL FLOOR AND SITE PLAN	07.03.25
E-201	LIGHTING PLAN	07.03.25
E-301	ELECTRICAL DETAILS	07.03.25

PROJECT TEAM

ARCHITECT:






Alliance Design Group, L.L.C.
1439 CENTRE CT, STE 401
Alexandria, LA 71301
Ph: 318.445.3151
Fx: 318.445.3988
Em: adg@adgllc.net
Contact: William A. Tudor, A.I.A.

MECHANICAL ELECTRICAL ENGINEER:



EMA COMPANY
9441 Stevens Rd., Ste 200
Shreveport, Louisiana 711

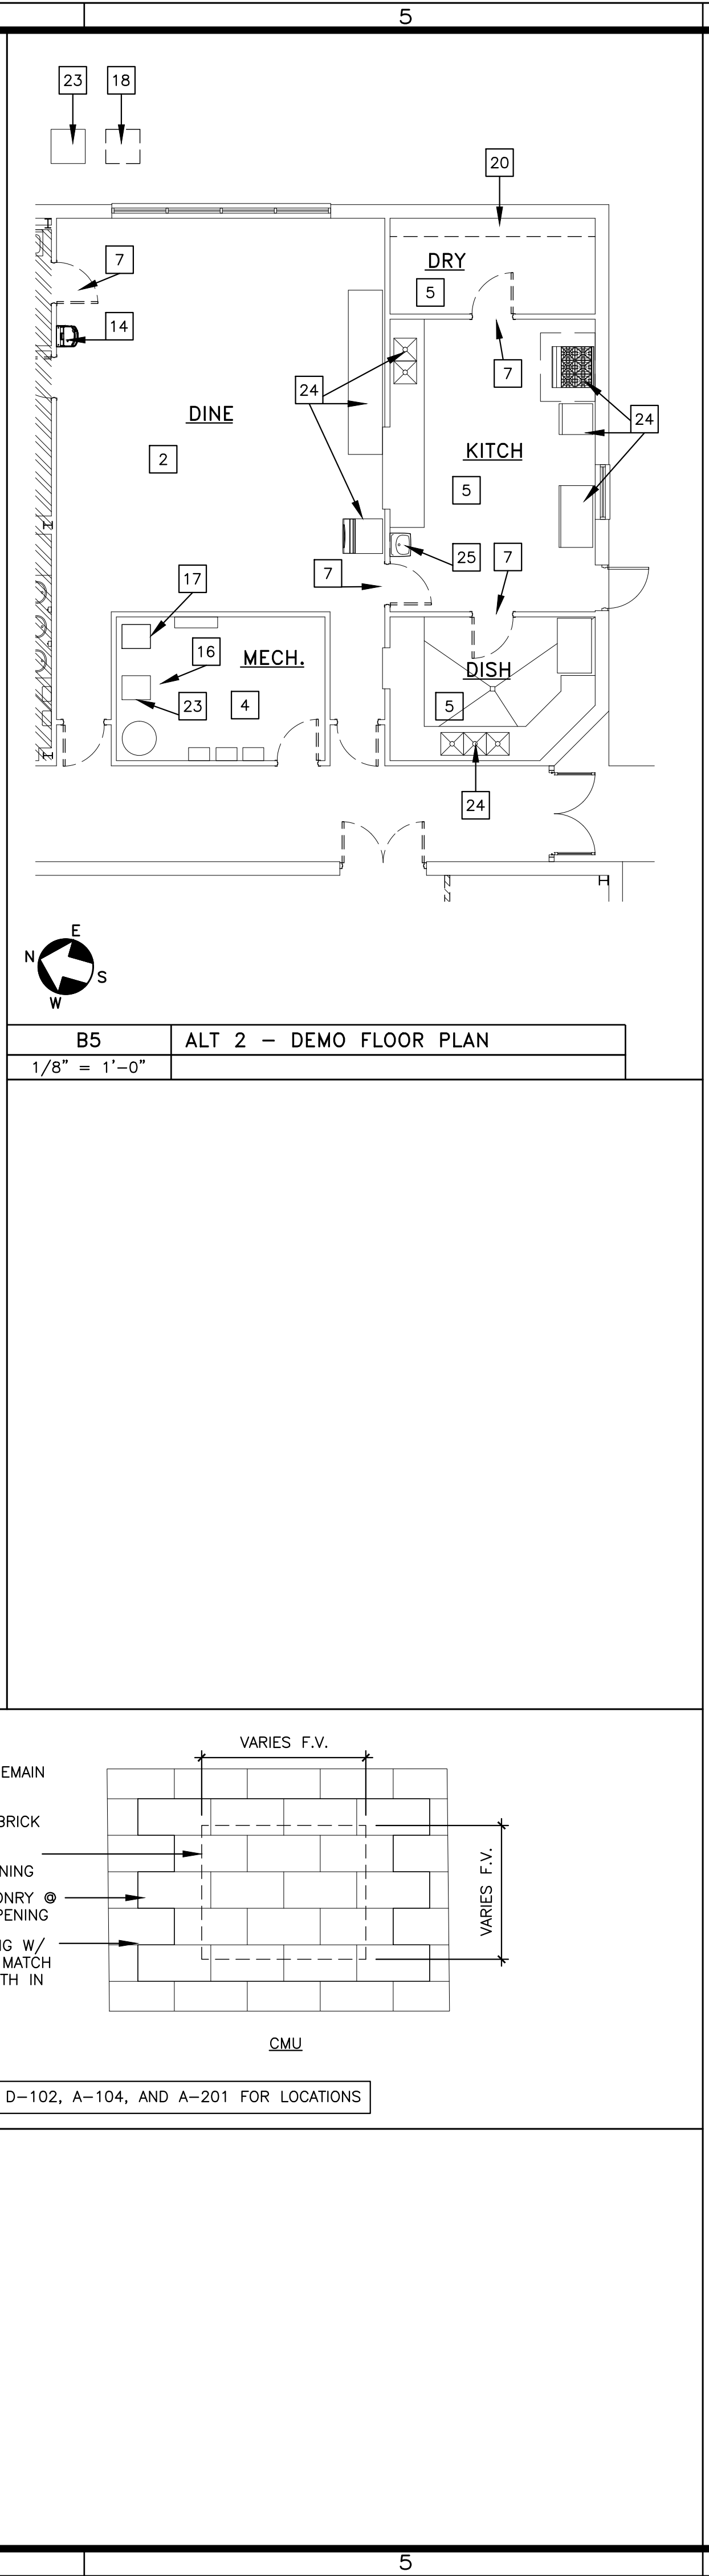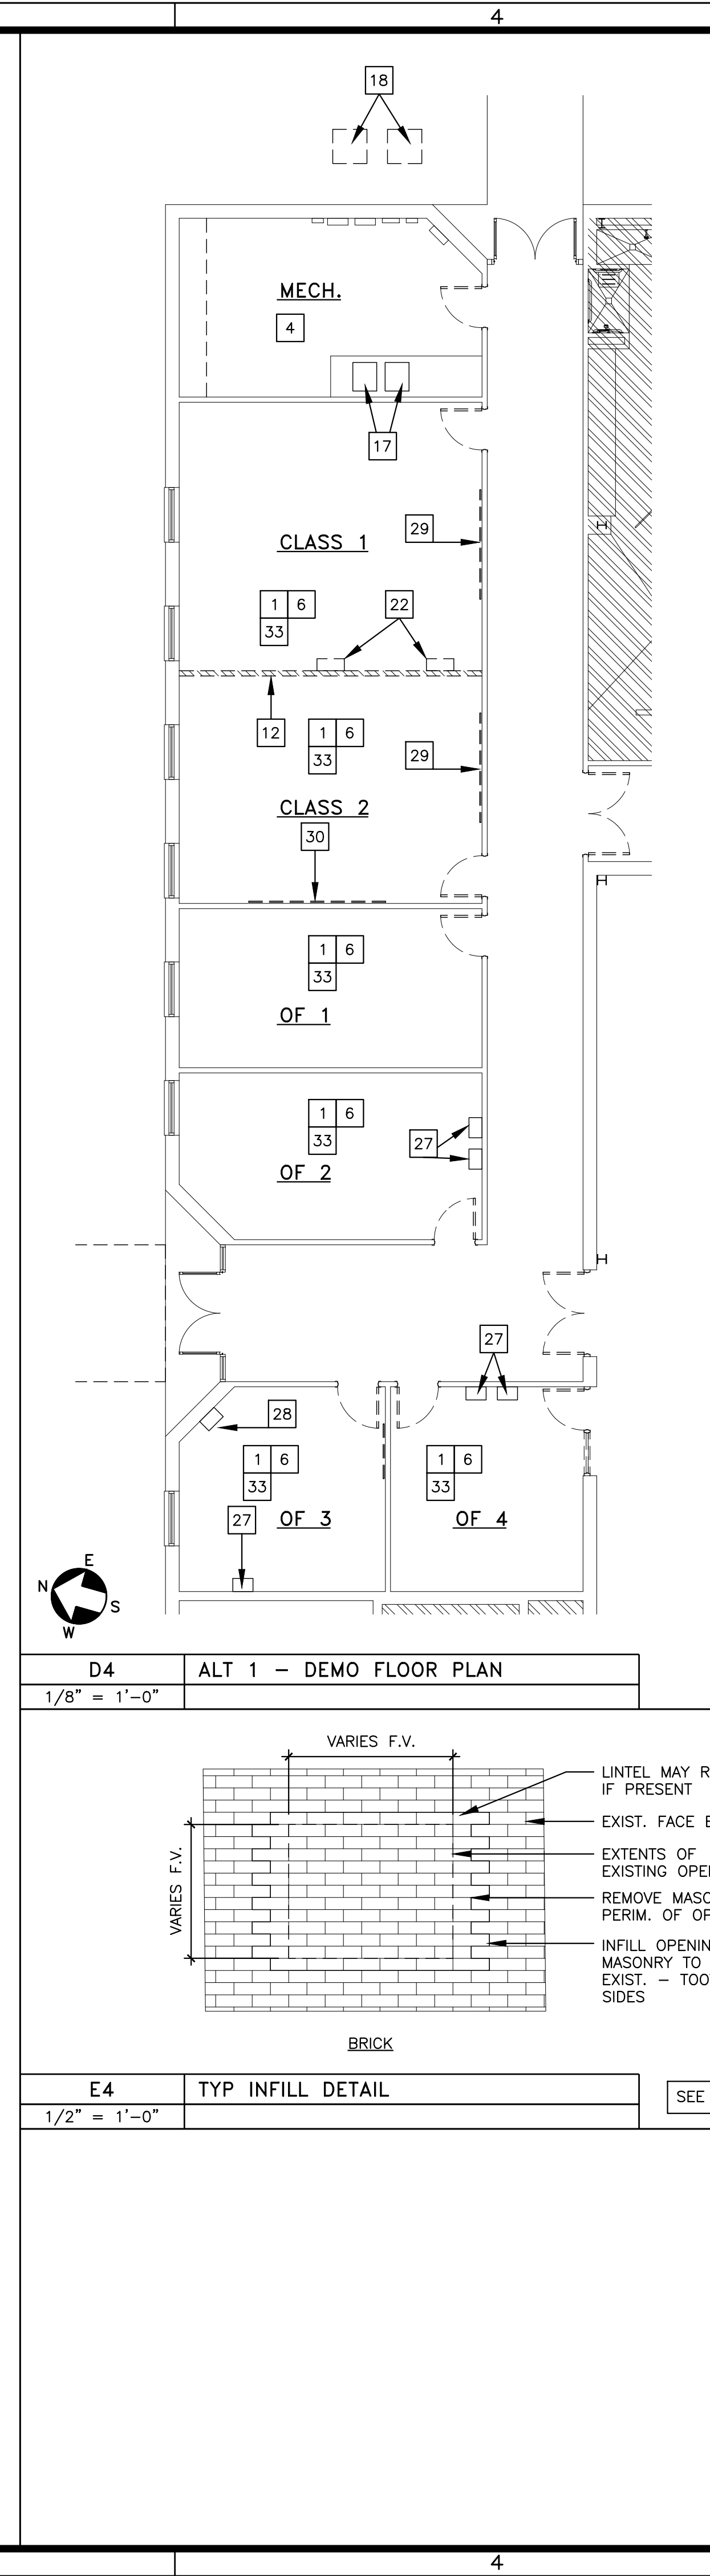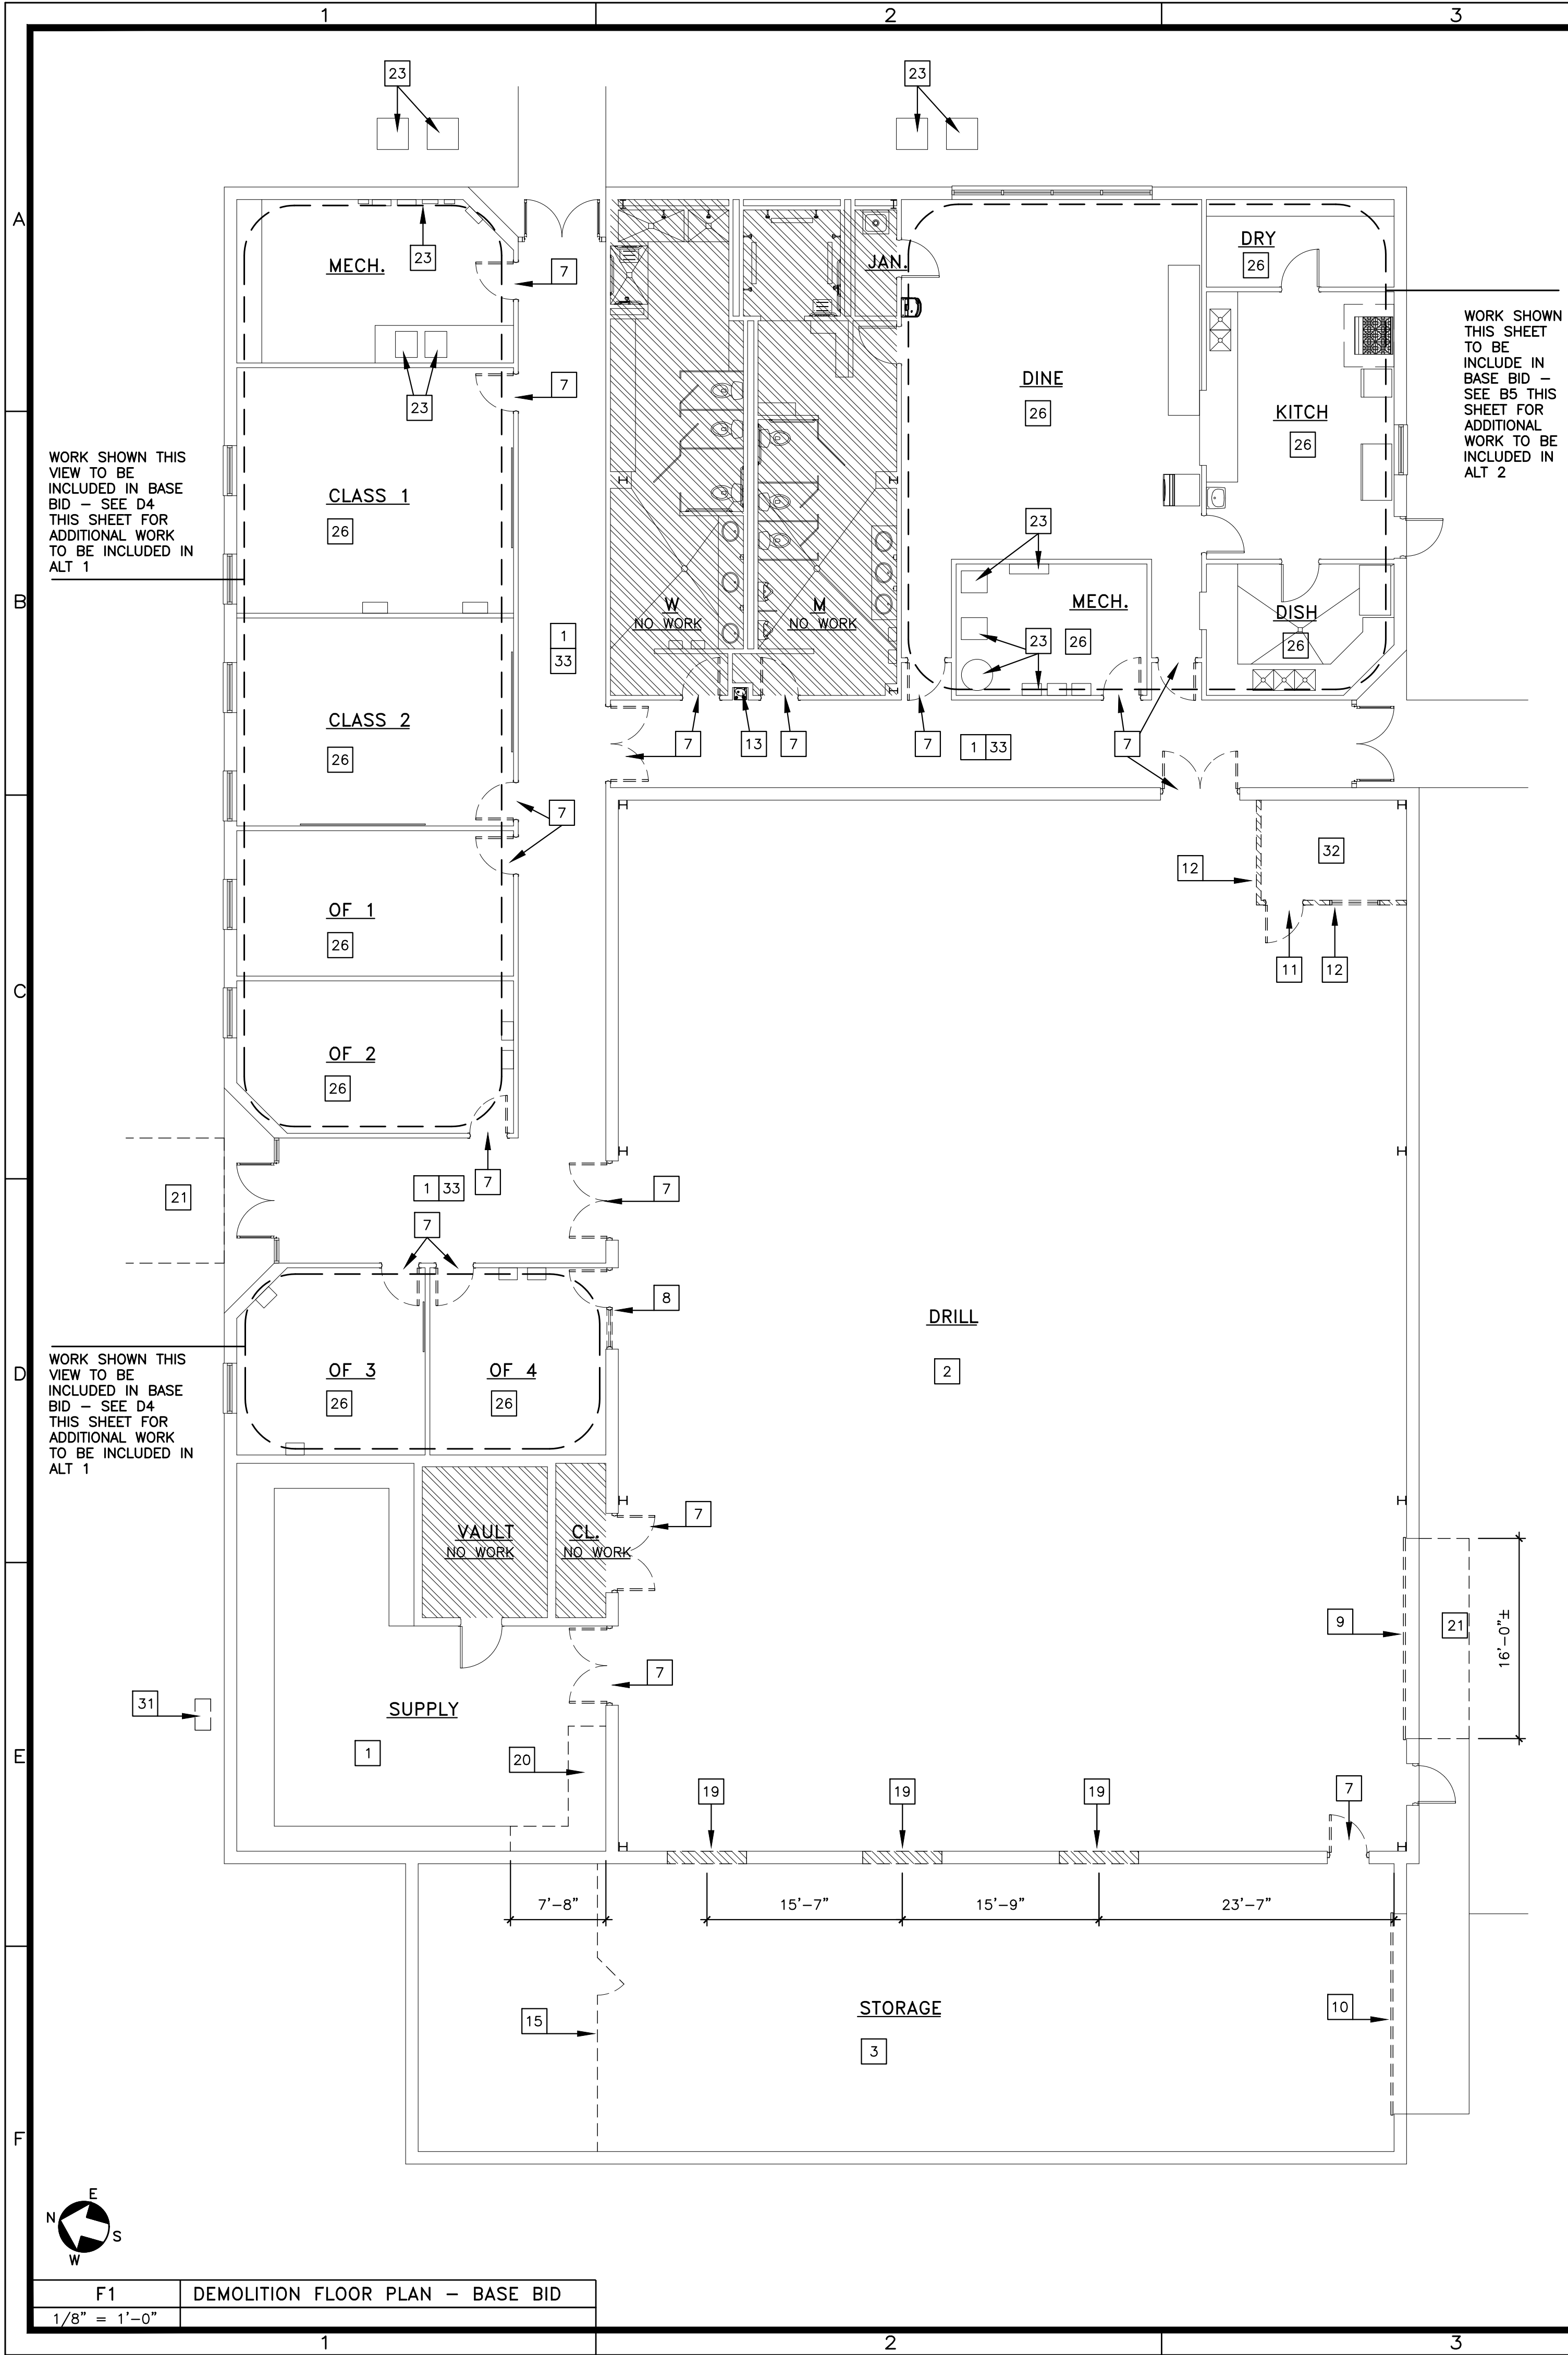

- GENERAL NOTES:**
- A. WALLS AND DOORS SHOWN ARE EXISTING – PROTECT EXISTING ITEMS TO REMAIN DURING CONSTRUCTION
 - B. SEE MEP SHEETS FOR ADDITIONAL DEMOLITION INFORMATION
 - C. MECHANICAL, ELECTRICAL, AND PLUMBING CONTRACTORS ARE TO RELOCATE AND/OR CAP ITEMS WHICH ARE CONCEALED WITHIN AND/OR ATTACHED TO ELEMENTS TO BE REMOVED – CAP ITEMS AT SOURCE
- FLOOR PLAN KEYED NOTES:**
- 1. REMOVE BASE AND VCT – PREPARE SURFACE FOR NEW FINISH
 - 2. PREPARE EXIST. CONC. FLOOR FOR NEW FINISH
 - 3. REMOVE BASE AND ANY LOOSE EPOXY COATING – PREPARE SURFACE FOR NEW FINISH
 - 4. REMOVE BASE AND PREPARE CONC. FLOOR FOR NEW FINISH
 - 5. EXIST. QUARRY TILE FLOOR TO REMAIN – PROTECT DURING CONSTRUCTION
 - 6. REMOVE AND REINSTALL ANY WALL MOUNTED DEVICES AND/OR EQUIPMENT – ADJUST OUTLETS AND SWITCHES FOR NEW WALL THICKNESS
 - 7. REMOVE DOOR AND HARDWARE – PREPARE FRAME FOR NEW DOOR AND FINISH
 - 8. REMOVE DOOR, FRAME, AND HARDWARE – PREPARE OPENING FOR NEW INFILL (E4/A-102)
 - 9. REMOVE OVERHEAD DOOR, TRACK, AND ALL RELATED ITEMS – PREPARE OPENING FOR NEW DOOR – MAINTAIN ELEC. FOR NEW DOOR
 - 10. REMOVE OVERHEAD DOOR, TRACK, STEEL JAMB AND ALL RELATED ITEMS – PREPARE OPENING FOR NEW INFILL
 - 11. REMOVE DOOR, FRAME, AND HARDWARE
 - 12. REMOVE STUD WALL AND FINISHES
 - 13. REMOVE DRINKING FOUNTAIN – CAP WATER AND SANITARY WITHIN WALL – PATCH WALL AND FINISH TO MATCH ADJACENT CONSTRUCTION
 - 14. REMOVE DRINKING FOUNTAIN – REVISE WATER AND SANITARY AS NEEDED FOR NEW FIXTURE – SEE PLUMB.
 - 15. REMOVE WIRE MESH PARTITION AND DOOR – SALVAGE AND RELOCATE
 - 16. RELOCATE GAS LINE OUTSIDE OF SERVICE AREA FOR UNITS SEE MECH.
 - 17. REMOVE AHU – MAINTAIN CONNECTIONS FOR NEW UNIT – SEE MECH.
 - 18. REMOVE CONDENSING UNIT – MAINTAIN CONNECTIONS FOR NEW UNIT – SEE MECH.
 - 19. REMOVE MASONRY WALL AS REQ'D TO INSTALL NEW DOOR AND LINTEL – SEE 4&5 F1/A-602 – REMOVE WALL AND PROVIDE FLOOR PATCH TO PROVIDE LEVEL TRANSITION ACROSS OPENING
 - 20

