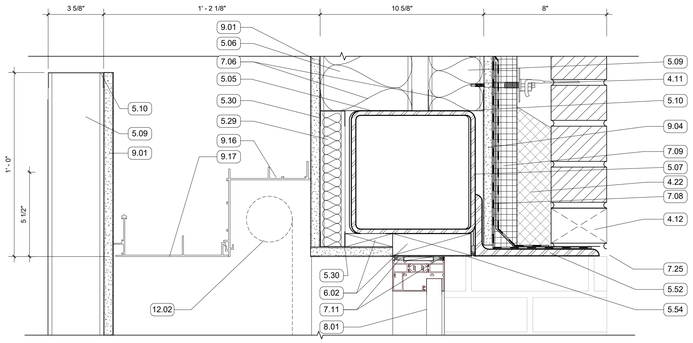

3 SECTION DETAIL
3" = 1'-0" | RE:3/A352



2 SECTION DETAIL
3" = 1'-0" | RE:3/A352

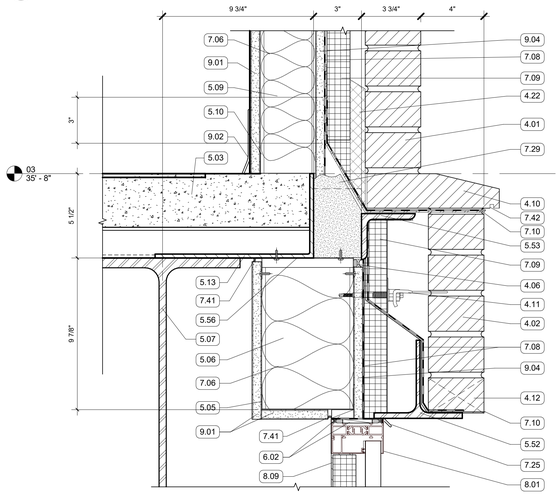

1 SECTION DETAIL - 3RD FLOOR MASONRY B
3" = 1'-0" | RE:3/A352

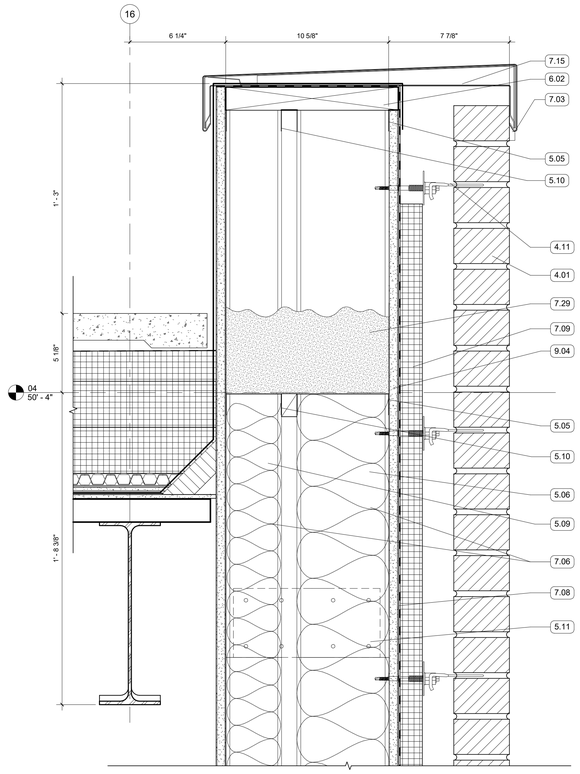

6 SECTION DETAIL
3" = 1'-0" | RE:2/A353

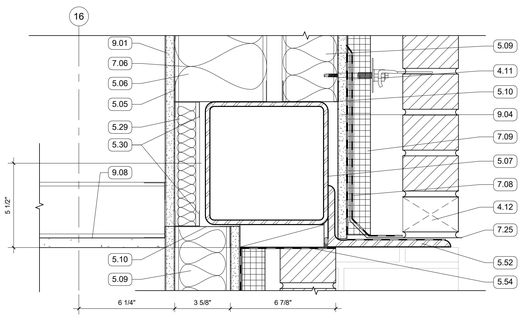

5 SECTION DETAIL
3" = 1'-0" | RE:1/A353

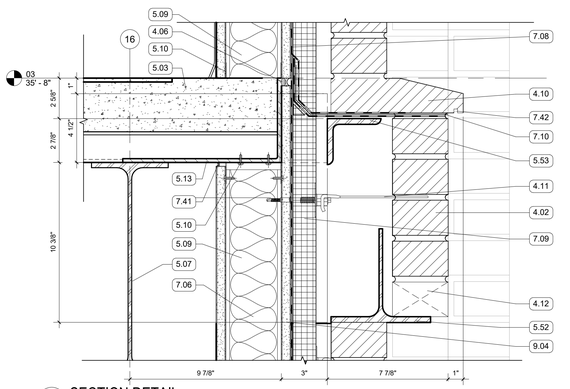

4 SECTION DETAIL
3" = 1'-0" | RE:4/A350

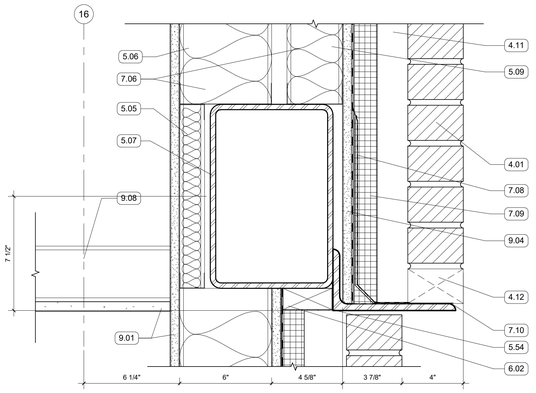

9 SECTION DETAIL
3" = 1'-0" | RE:2/A353

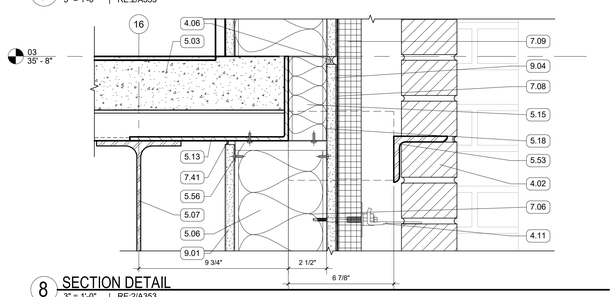

8 SECTION DETAIL
3" = 1'-0" | RE:2/A353

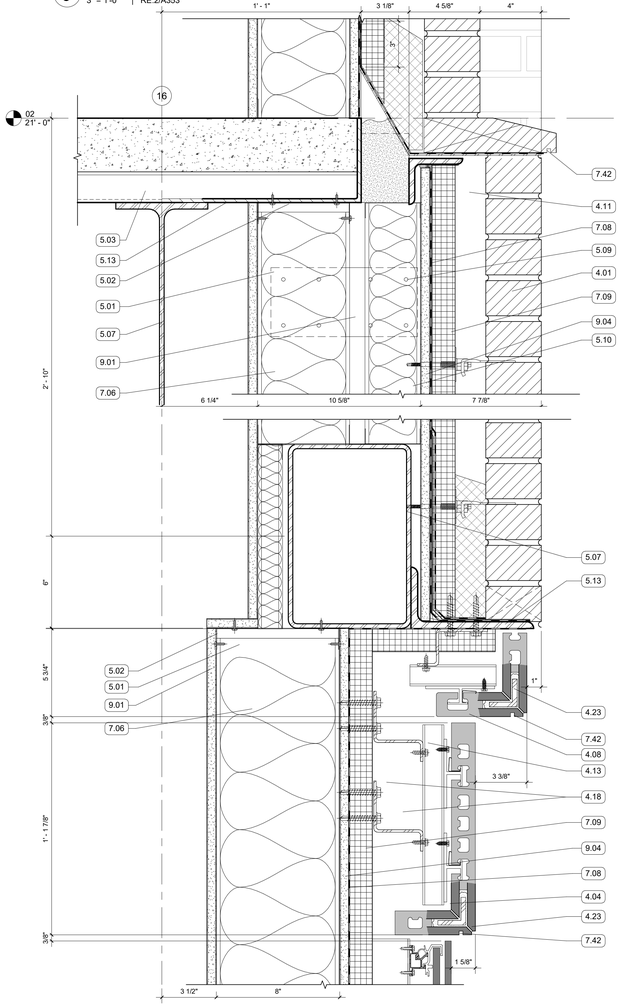

7 SECTION DETAIL - MASONRY TO TERRA COTTA SOFFIT
3" = 1'-0" | RE:2/A353

GENERAL NOTES

KEYNOTES

4.01	FACE BRICK VENEER, RUNNING BOND
4.02	4" RECESSED BRICK COURSE, RUNNING BOND, RECESS HORIZONTAL BANDS AN ADDITIONAL 1/2"
4.04	TERRA COTTA RAINSCREEN - STACK BOND, UNIT SIZE #1
4.06	MASONRY CONTROL JOINT
4.08	PLASTER SOFFIT SYSTEM ON MTL. FRAMING - ALTERNATE NO. 2 REPLACES PLASTER SYSTEM WITH TERRA COTTA LARGE FORMAT SOFFIT PANELS
4.10	FACE BRICK, SPECIAL SHAPE SILL
4.11	MASONRY ANCHORS
4.12	WEEP VENTS AT 24" O.C. MIN
4.13	NON-CONTINUOUS ALUMINUM SUBSTRUCTURE
4.18	CONTINUOUS ALUMINUM SUBSTRUCTURE
4.22	MORTAR NET
4.23	BONDED CORNER
5.01	8" METAL STUD FRAMING
5.02	8" METAL STUD TRACK
5.03	5 1/2" COMPOSITE MTL DECK AND CONCRETE SLAB
5.05	6" METAL TRACK
5.06	6" METAL STUD FRAMING
5.07	STRUCTURAL STEEL FRAMING
5.09	3 5/8" METAL STUD FRAMING
5.10	3 5/8" METAL TRACK
5.11	BRIDGE STUD AS REQ'D
5.13	EDGE ANGLE
5.15	2 1/2" METAL STUD FRAMING
5.18	2 1/2" METAL TRACK
5.29	1 5/8" METAL STUD FRAMING - SEE STRUCTURAL
5.30	1 5/8" METAL TRACK
5.52	GALVANIZED LOOSE LINTEL - PAINT TO MATCH BRICK WHERE EXPOSED
5.53	SHELF ANGLE - RE: STRUCTURAL
5.54	BRAKE METAL TRIM
5.56	DEFLECTION TRACK
6.02	WOOD BLOCKING
6.03	SOLID SURFACE WINDOW STOOL WITH CHAMFERED EDGES
7.03	PREFINISHED COPING FLASHING
7.06	BATT INSULATION, SIZED TO MATCH STUD DEPTH
7.08	AWB
7.09	MINERAL FIBER BOARD INSULATION
7.10	THRU-WALL FLASHING, SLOPED TO DRAIN
7.11	BACKER ROD AND SEALANT
7.15	CLEAT, CONT
7.25	FORMED ALUMINUM WINDOW HEAD FLASHING
7.29	SPRAYED FOAM INSULATION
7.41	CAULK
7.42	DRIP EDGE
8.01	ALUM STOREFRONT, CURTAINWALL, OR WINDOW SYSTEM. SEE OPENING SCHEDULE
8.09	BACK PANEL
9.01	5/8" GYPSUM BOARD; SEE FINISH PLAN FOR FINISH MATERIAL
9.02	WALL BASE, SEE FINISH PLAN FOR FINISH MATERIAL
9.04	5/8" EXTERIOR SHEATHING
9.08	GYP BD CEILING ON METAL FRAMING
9.08	GYP BD CEILING ON METAL FRAMING
9.16	2-SIDED PERIMETER POCKET
9.17	CEILING PERIMETER FACE PLATE 7"
12.02	ROLLER SHADE

ASHE | BROUSSARD | WEINZETTLE ARCHITECTS

TIPTON ASSOCIATES

CONSULTANTS
Moreauseaux-Butler & Associates, LLC — Civil
CARBO Landscape Architecture, LLC — Landscape
Fox-Nesbit Engineering, LLC — Structural
Salas O'Brien — Mechanical, Plumbing, Fire Protection
Associated Design Group, Inc. — Electrical
Geisler — Specialty Architectural

ISSUE FOR BID

LOUISIANA STATE UNIVERSITY ALEXANDRIA

DOWNTOWN HEALTH SERVICES CENTER

800 JACKSON ST.
ALEXANDRIA, LA 71301

PROJECT # 19-603.23-01
ARCH PROJECT # 2023.28 / 1531.00-23
SITE ID: NEW SITE CODE: E-40-023
DATE OCTOBER 10, 2025

Ashe Broussard Weinzettle Architects, LLP
Tipton Associates APAC, A Joint Venture
301 Jackson Street, Suite 205
Alexandria, LA 71301

NO.	REVISION	DATE



EXTERIOR SECTION DETAILS

A514