

PLUMBING FIXTURE SCHEDULE

SELF-RIMMING COUNTERTOP LAVATORY – MARKED (L-1):

KOHLER K-2196-1 (OR APPROVED EQUIVALENT) VIRTUOUS CHINA SELF RIMMING COUNTERTOP LAVATORY WITH FRONT OVERFLOW, FAUCET LEDGE, AND FAUCET HOLES ON 4" CENTERS. KOHLER K-15583-4ATA (OR APPROVED EQUIVALENT) SINGLE LEVER CONTROL, 4-3/16" SPOUT, AND VANDAL RESISTANT AERATOR. FURNISH AND INSTALL STOPS AND SUPPLIES, P-TRAP, AND ALL NECESSARY MEANS TO COMPLETE INSTALLATION. PROVIDE TRUEBRO LAY-GUARD 2 PIPE WRAP OR APPROVED EQUIVALENT. TAILPIECE AND DRAIN INCLUDED.

HANDICAPPED FLOOR MOUNTED TANK TYPE WATER CLOSET – MARKED (WC-1):

KOHLER HIGHLINE K-5298 VITREOUS CHINA. FLOOR MOUNTED, ELONGATED, TWO PIECE COMBINATION TANK TYPE TOILET, OPERATES AT 1.0 GPF. COLOR TO BE WHITE, 12" ROUGH IN AND 16-1/2" RIM HEIGHT, SIPHON ACTION JETTED BOWL, FULLY GLAZED 2" TRAPWAY. COORDINATE GRAB BARS PRIOR TO BIDDING AND INSTALLATION, WATER CLOSET SHALL BE ADA COMPLIANT.

URINAL MARKED – (UR-1):

KOHLER MODEL K-5016-ETSS-O VITREOUS CHINA WALL HUNG URINAL WITH FLUSHING RIM, SIPHON JET FLUSH ACTION, 3/4" TOP SPUD INLET, WALL HANGER. PROVIDE SLOAN ROYAL MODEL 186-1 HL3 FLUSH VALVE WITH LOW-CONSUMPTION 1.0 GALLONS PER FLUSH. PROVIDE ZURN MODEL Z1221 PLATE TYPE SYSTEM WALL URINAL CARRIER. COORDINATE MOUNTING HEIGHT WITH ARCHITECTURAL DRAWINGS. COLOR TO BE WHITE.

DUAL HEIGHT ELECTRIC WATER COOLER MARKED – (EWC-1):

ELKAY LZSTLBWSLK (OR APPROVED EQUIVALENT) EZH2O BOTTLE FILLING STATION & VERSATILE BI-LEVEL ADA COOLER FILTERED REFRIGERATED LIGHT GRAY. CHILLING CAPACITY OF 8.0 GPH (GALLONS PER HOUR) OF 50°F DRINKING WATER, BASED ON 80°F INLET WATER AND 90°F AMBIENT, PER ASHRAE 18 TESTING. FEATURES SHALL INCLUDE ANTIMICROBIAL, FILTERED, GREEN TICKER, HANDS FREE, LAMINAR FLOW, REAL DRAIN, VISUAL FILTER MONITOR, QUICK FILTER CHANGE, ENERGY SAVINGS. FURNISHED WITH FLEXIGUARD SAFETY BUBBLER. ELECTRONIC BOTTLE FILLER SENSOR WITH ELECTRONIC FRONT AND SIDE BUBBLER PUSHBAR ACTIVATION. PRODUCT SHALL BE WALL MOUNT (ON WALL), FOR INDOOR APPLICATIONS, SERVING 2 STATION(S). UNIT SHALL BE CERTIFIED TO UL 399 AND CAN/CSA C22.2 NO. 120.

SINGLE BOWL SINK MARKED (SK-1):

ELKAY MODEL ECTRU17179T (UNDER MOUNT) JUST SELF-RIMMING SINK WITH #18 GAUGE, TYPE 304 STAINLESS STEEL, 9" DEEP SINGLE BOWL COMPLETE WITH ELKAY LKAV3021 DECK MOUNT SINK FAUCET WITH 6-1/2" GOOSENECK SPOUT, SINGLE FAUCET HOLE, AND SINGLE LEVER HANDLE, AND STANDARD CONTROL AERATOR. PROVIDE P-TRAP AND LOOSE-KEY ANGLE STOPS AS NEEDED TO COMPLETE INSTALLATION.

DOUBLE COMPARTMENT SINK MARKED (SK-2):

ELKAY MODEL K-80085-1PC, SELF RIMMING, DOUBLE COMPARTMENT SINK, #18 GAUGE, STAINLESS STEEL, 9" DEEP DOUBLE BOWL COMPLETE WITH KOHLER MODEL K-22972 DECK MOUNTED KITCHEN FAUCET WITH 8-19/16" GOOSENECK SWING SPOUT WITH PULL-DOWN SPRAYHEAD, SINGLE FAUCET HOLE, AND SINGLE LEVER HANDLE. FURNISH AND INSTALL ALL SUPPLIES ANGLE STOPS AS NEEDED TO COMPLETE INSTALLATION.

FLOOR MOUNTED SERVICE SINK – MARKED (SS-1):

TERRAZZO TSBC1610 WITH STAINLESS STEEL CAPS ON THRESHOLDS ONLY. STANDARD DRAIN BODY CAST IN STAINLESS STEEL. STAINLESS STEEL STRAINER #14538B. AMERICAN STANDARD EXPOSED YOKE WALL-MOUNT UTILITY FAUCET 8344.012.

DOMESTIC WATER CIRCULATING PUMP – MARKED (HWRP-1):

FURNISH AND INSTALL DOMESTIC WATER CIRCULATING PUMP WITH TIMER. PUMP SHALL BE TACO MODEL 006-B STAINLESS STEEL CIRCULATOR RATED FOR 11 GPM @9.5' TDH. CIRCULATING SHALL BE EQUIVALENT TO FOLLOWING SPECIFICATIONS. FURNISH AND INSTALL AUTOMATIC TIMER AQUASTAT. INSTALL AS PER MANUFACTURES RECOMMENDATIONS. PUMP SHALL HAVE 1/40 HP @3250 RPM, 0.52 AMPS, 115/60/1 ELECTRICAL SERVICE. ELECTRICAL CHARACTERISTICS FOR TIMER AQUASTAT ARE 115/60/1, 16 AMPS @ 115 VOLTS. SEE DETAIL 4 AND 8 ON SHEET M2 FOR REFERENCE

FLOOR DRAIN – MARKED (FD-1):

ZURN EZ1 FLOOR AND SHOWER DRAIN, PVC SOLVENT WELD BODY WITH BOTTOM OUTLET AND 1/2" TRAP PRIMER CONNECTION KNOCK-OUT PLUG AND TOP ASSEMBLY. EZ1TM DRAINAGE SERIES IS ENGINEERED TO SIMPLIFY PRODUCT INSTALLATION, COMPRISED OF CONCRETE SHIELD, UP TO1" [25] OF VERTICAL POST POUR ADJUSTMENT, PRE-PACKAGED SHIMS FOR TILT CORRECTION AND INTEGRATED SELF-CONTAINED SQUARE OR ROUND LIGHT DUTY STRAINER IN NICKEL BRONZE OR STAINLESS STEEL WITH ROUGH-IN COVER FOR PROTECTION DURING THE CONCRETE POUR.

CLEAN OUT ABOVE SLAB – MARKED (CO-1):

OATEY 42745 4" BRASS CLEANOUT PLUG

EXTERIOR TWO-WAY CLEAN OUT – MARKED (ECO-1):

ZURN-ZN-1400-HD-G-NL-CI TOP COTG CAST IRON BODY WITH ROUND TOP.

WALL CLEAN OUT – MARKED (WCO-1):

ZURN-Z1446-BP 4" TOP COTG CAST IRON BODY WITH ROUND TOP.

EXTERIOR HOSE BIB – MARKED (HB-1):

FREEZE PROOF WALL HYDRANT ZURN Z1320 (OR APPROVED EQUIVALENT) WITH HOSE CONNECTION, ANTI-SIPHON VACUUM BREAKERS, LOOSE KEY, BOX AND DOOR.

ACCEPTABLE MANUFACTURERS: THIS SCHEDULE INDICATES ON BASIS OF DESIGN

MOEN, FRANKE, TODO, SOUX CHIEF, T&S, APOLLO VALVE, ZURN, ACORN, BRADLEY, AMERICAN STANDARD, WADE, HAWS, WOODFORD, KOHLER, CRANE, SLOAN, AQUA BATH, SYMMONS, ELKAY, J.R. SMITH, CHURCH, BENEKE, DELTA, RUUD, TACO, SPEAKMAN, ESP AGENCY, EEMAX, A.O. SMITH, COMFORT DESIGNS, RELIABLE, PRECISION PLUMBING PRODUCTS, MUSTEE, WATTS, GRUNDFOS, POWERS, ARMSTRONG, ROCKFORD, HOLBY, CHICAGO, JUST, JOSAM, RHEEM, AQUA GLASS, OR VITRA



Job Title:


Office of the State
Public Defender
District 8
Office Building

111 West Main Street

Winnfield, LA 71483

CDMorgan

& ASSOCIATES, INC.
ENGINEERING CONSULTANTS
A PROFESSIONAL ENGINEERING AND ARCHITECTURAL CORPORATION
CARENCRO LOUISIANA

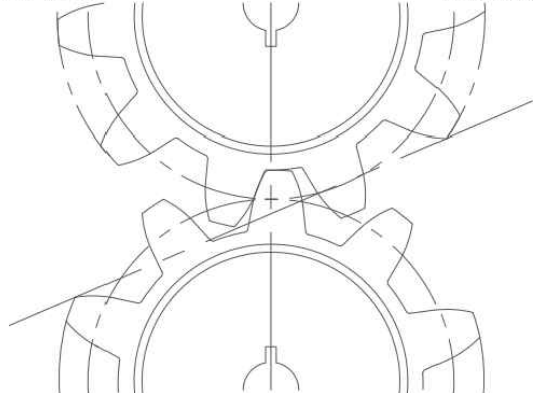

(337) 886-1280
www.CDMorgan.com



Seal:

May 15, 2026

Construction Documents

No.	Description	Date

KEY PLAN

PLUMBING FIXTURE
SCHEDULE

Project No.: BL0001-25

Drawn By: TWN

P5

OSPD

Sheet No.: