


- PLUMBING GENERAL NOTES:**
- A. ALL WORK SHALL BE IN ACCORDANCE WITH APPLICABLE LOCAL, STATE, AND FEDERAL CODES (INCLUDING INTERNATIONAL PLUMBING CODE, INTERNATIONAL BUILDING CODE, NFPA, ETC.) AND APPLICABLE DEQ AND DMRP REGULATIONS TO THE SATISFACTION OF THE AUTHORITIES HAVING JURISDICTION. CONTRACTOR SHALL OBTAIN REQUIRED PERMITS AND APPROPRIATE WORK AUTHORIZATION PRIOR TO BEGINNING WORK.
 - B. CONTRACTOR SHALL VERIFY EXACT LOCATION OF UTILITIES, INVERT ELEVATIONS, ETC. PRIOR TO BEGINNING ANY ROUGH-IN OF SUBSURFACE WORK. COORDINATE ALL UTILITY TIE-IN REQUIREMENTS WITH RESPECTIVE UTILITIES.
 - C. REFER TO ARCHITECTURAL DRAWINGS FOR ALL DIMENSIONS, DETAILS, ETC. INSTALL WORK TO CONFORM TO ARCHITECTURAL AND STRUCTURAL DRAWINGS AS REQUIRED. REVIEW COMPLETE SET OF CONTRACT DOCUMENTS PRIOR TO SUBMITTING BID.
 - D. CONTRACTOR SHALL RUN ALL NEW UTILITIES (WATER, SEWER, ETC.) AROUND NEW CONSTRUCTION AREA AS INDICATED PRIOR TO SHUTTING DOWN OR TIE-ING INTO ANY SYSTEMS. COORDINATE ALL UTILITY SERVICE DISRUPTIONS TO OTHER UTILITY CUSTOMERS WITH RESPECTIVE UTILITY. ALL UTILITY RELOCATION (SUCH AS WATER) SHALL BE DONE IN STRICT COMPLIANCE WITH UTILITY COMPANY STANDARDS AND REQUIREMENTS. CONTACT UTILITY COMPANY AND VERIFY AND DOCUMENT REQUIREMENTS, COST, CHARGES, ETC. CONTRACTOR SHALL FULLY COMPLY WITH ALL UTILITY COMPANY REQUIREMENTS.
 - E. COORDINATE ALL WORK THROUGH GENERAL CONTRACTOR. COORDINATE CUTTING, PATCHING, TRENCHING WORK WITH SITE GRADING/PAVING PLAN.
 - F. UNDERGROUND UTILITIES ARE APPROXIMATE. VERIFY INVERTS AND EXACT LOCATIONS WITH UTILITY PERSONNEL. VERIFY ALL EASEMENTS WITH APPROPRIATE PARTIES. ADJUST ALL UTILITY LINES ACCORDINGLY.
 - G. ALL DOMESTIC WATER BRANCH LINES SHALL HAVE VALVES AT MAINLINES.
 - H. THE EXISTING BUILDING WILL BE OCCUPIED DURING CONSTRUCTION DURING NORMAL BUSINESS HOURS, WHICH ARE 7:30 AM TO 5:00 PM ON MONDAY THRU THURSDAY AND 7:30 AM TO NOON ON FRIDAY. ADDITIONALLY, THERE ARE REGULARLY SCHEDULED MEETINGS IN THE EVENINGS.



ASSOCIATED DESIGN GROUP, INC.
3909 W Congress Street, Suite 201
Lafayette, Louisiana 70506
Phone: (337) 234-5710
Email: adginc@adginc.org

Project No. 25097

	ADDENDUM NO. 4	05.14.2026
NO.	REVISIONS/SUBMISSIONS	DATE


Lynn Guidry
ARCHITECT

411 ARCENEUX ROAD CARENCRO LOUISIANA 70520
337.846.6645 email: lynn@lynnguidryarchitect.com

CARENCRO
CITY HALL
EXPANSION
2026



210 EAST ST. PETER STREET CARENCRO, LOUISIANA

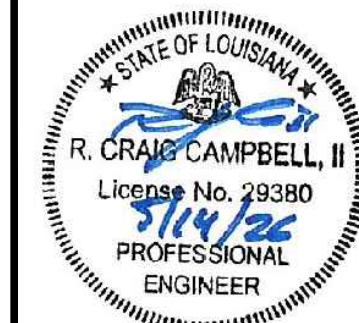Drawing Title PLUMBING ROOF PLAN		
	Designed DEP	Project No. 2024.006
	Drawn RW	Scale AS NOTED
	Checked RCC	Drawing No. P.190R1
	Reviewed RCC	68 of 83
	Date FEB. 10, 2026	