


\\0131\0000\7824_natchitoches fire station\2-preliminary plans\civil\7824_site_plan.dwg 2/25/10 14:43:16 PM

D

C


B

A

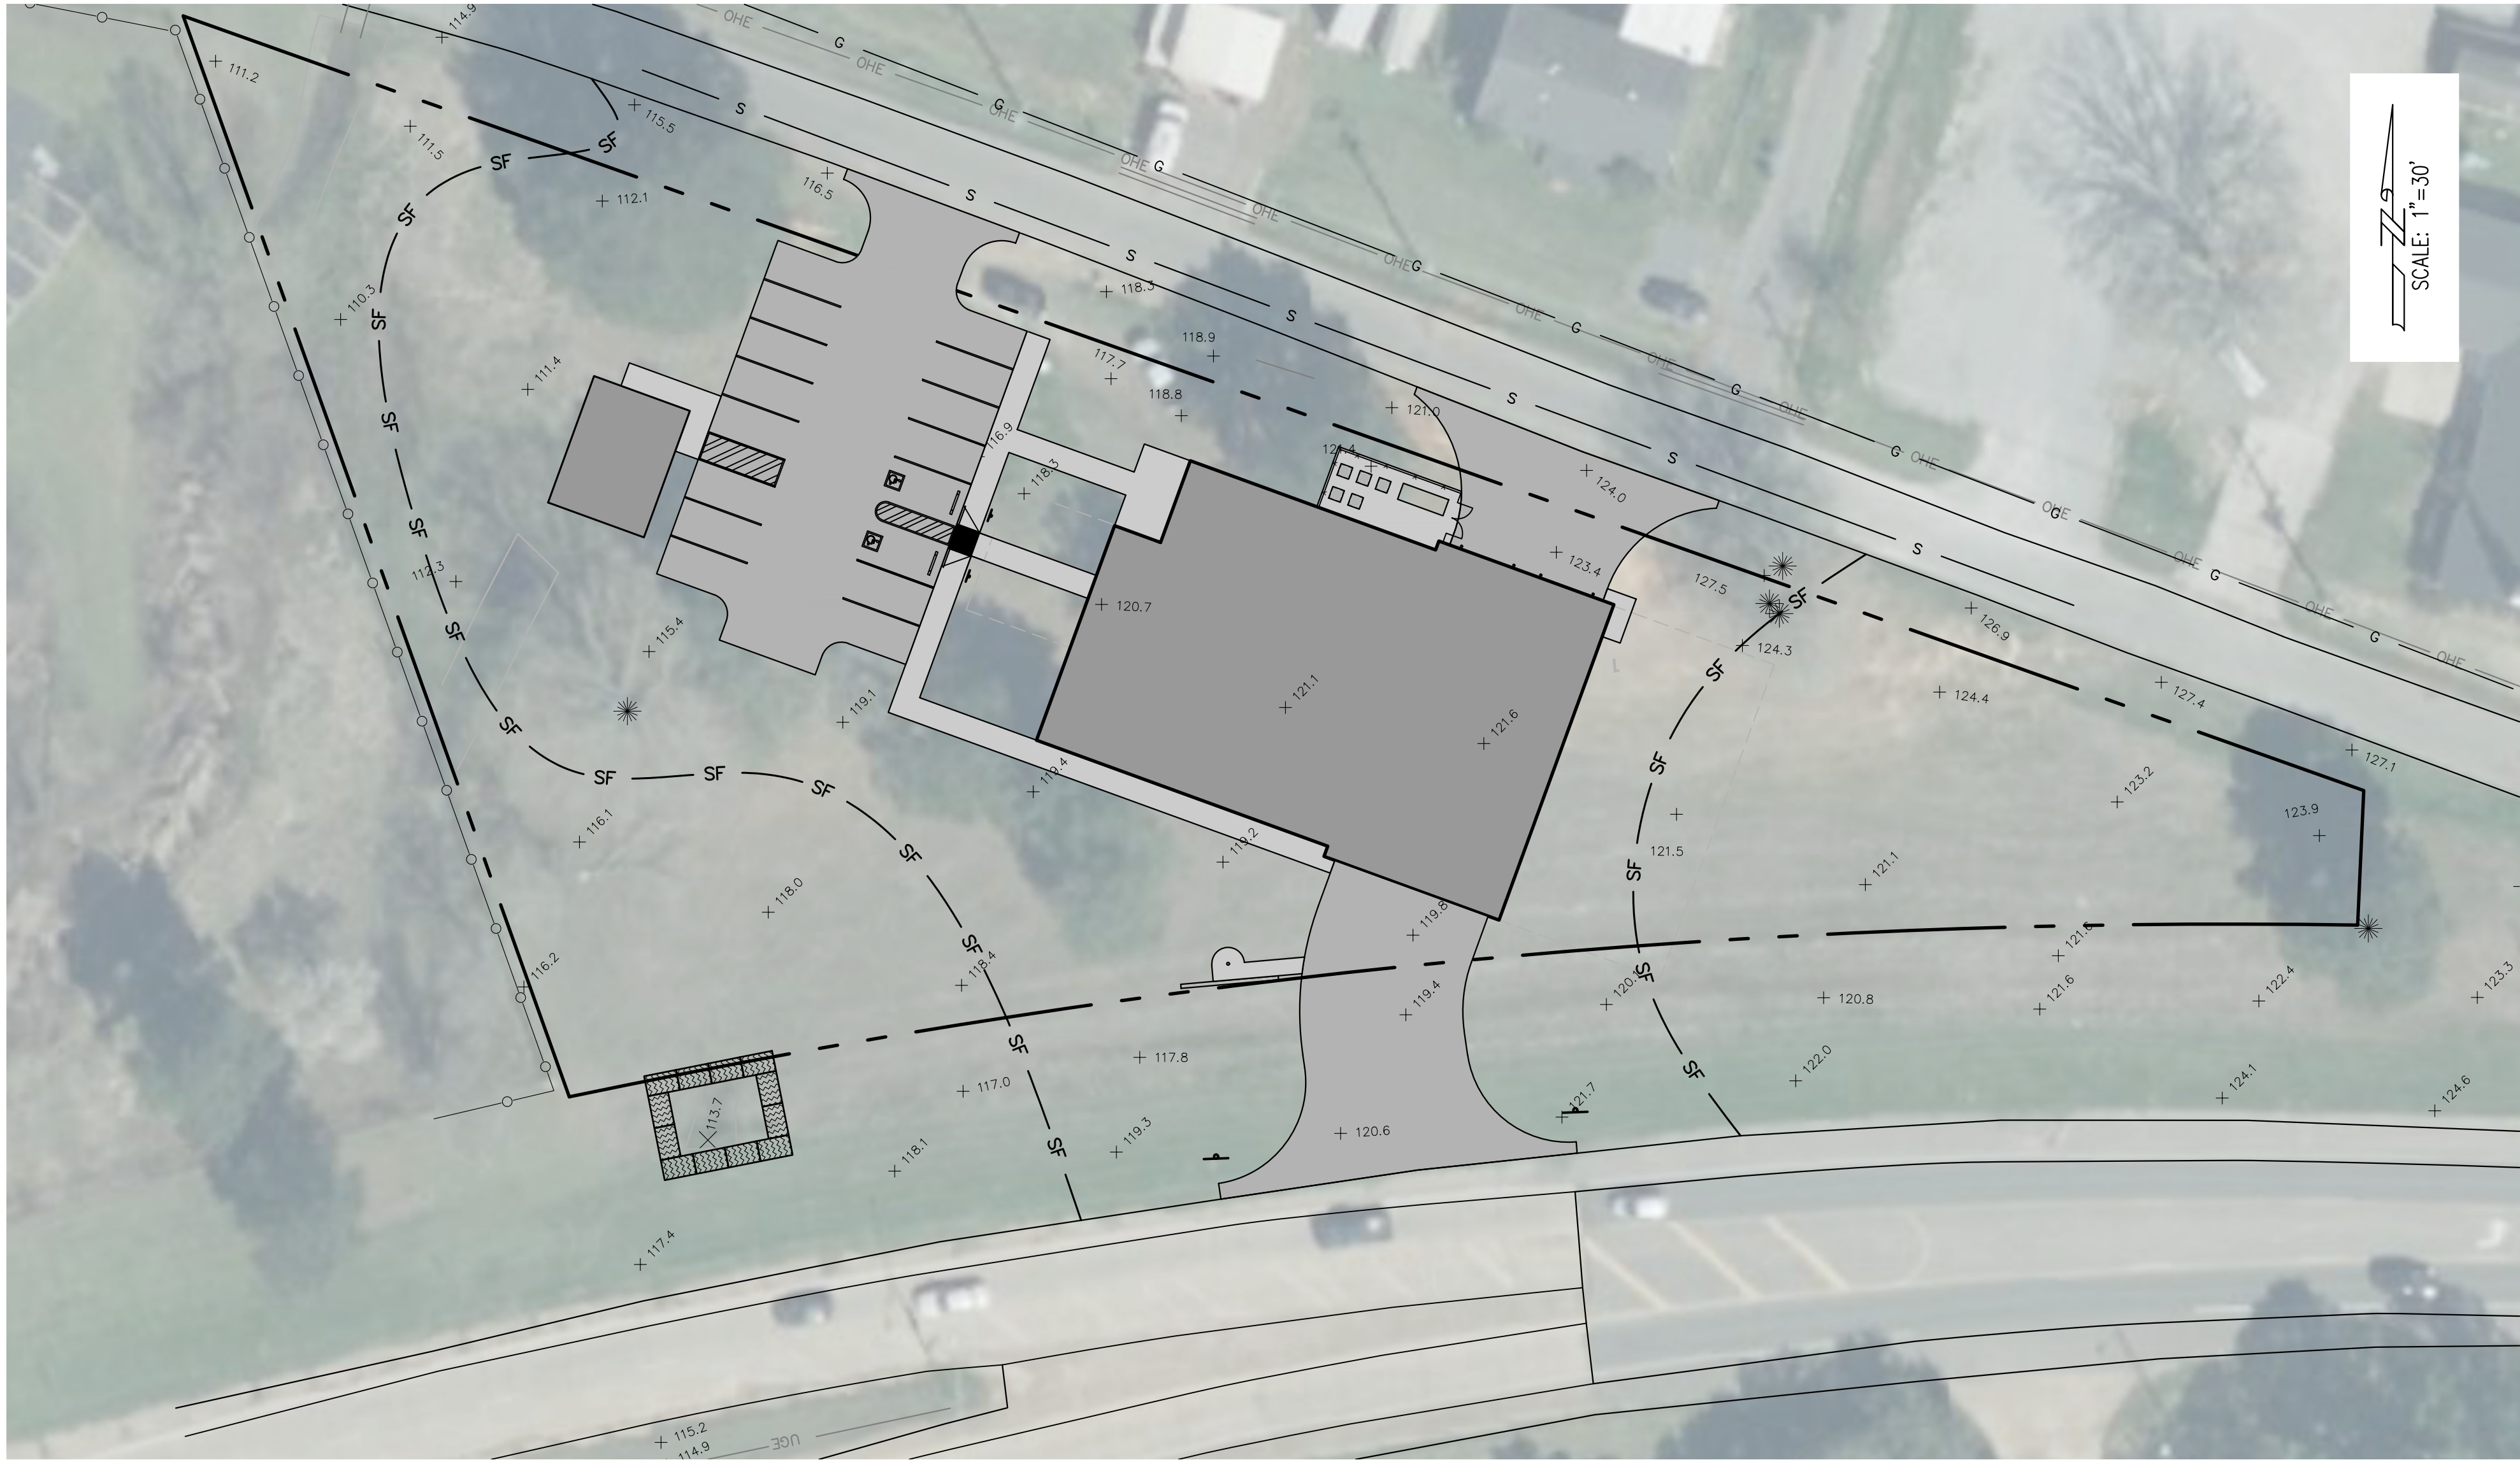


LEGEND:


- SF ——— TEMPORARY SILT FENCING
- TEMPORARY BALED HAY FILTER DAMS
- HAY BALE INLET SEDIMENT FILTER
- SILT FENCE INLET SEDIMENT FILTER

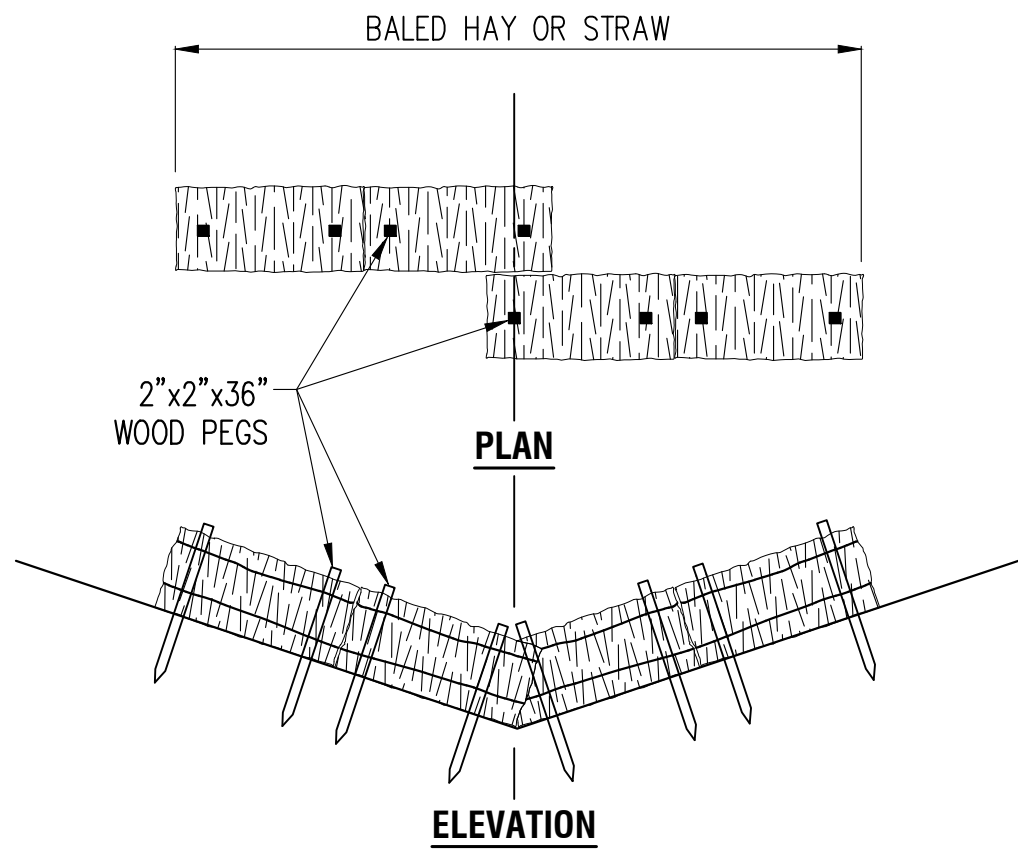

2 TEMPORARY BALED HAY FILTER DAMS
SCALE: N.T.S.
RE: 1/C600

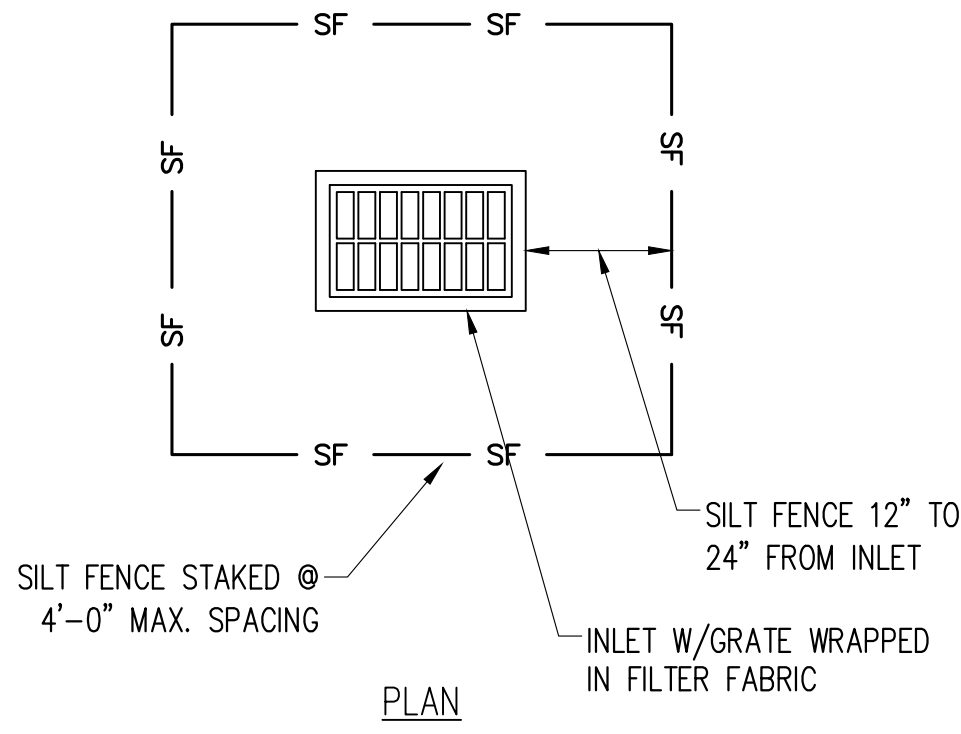

3 SILT FENCE INLET SEDIMENT FILTER
SCALE: N.T.S.
RE: 1/C600

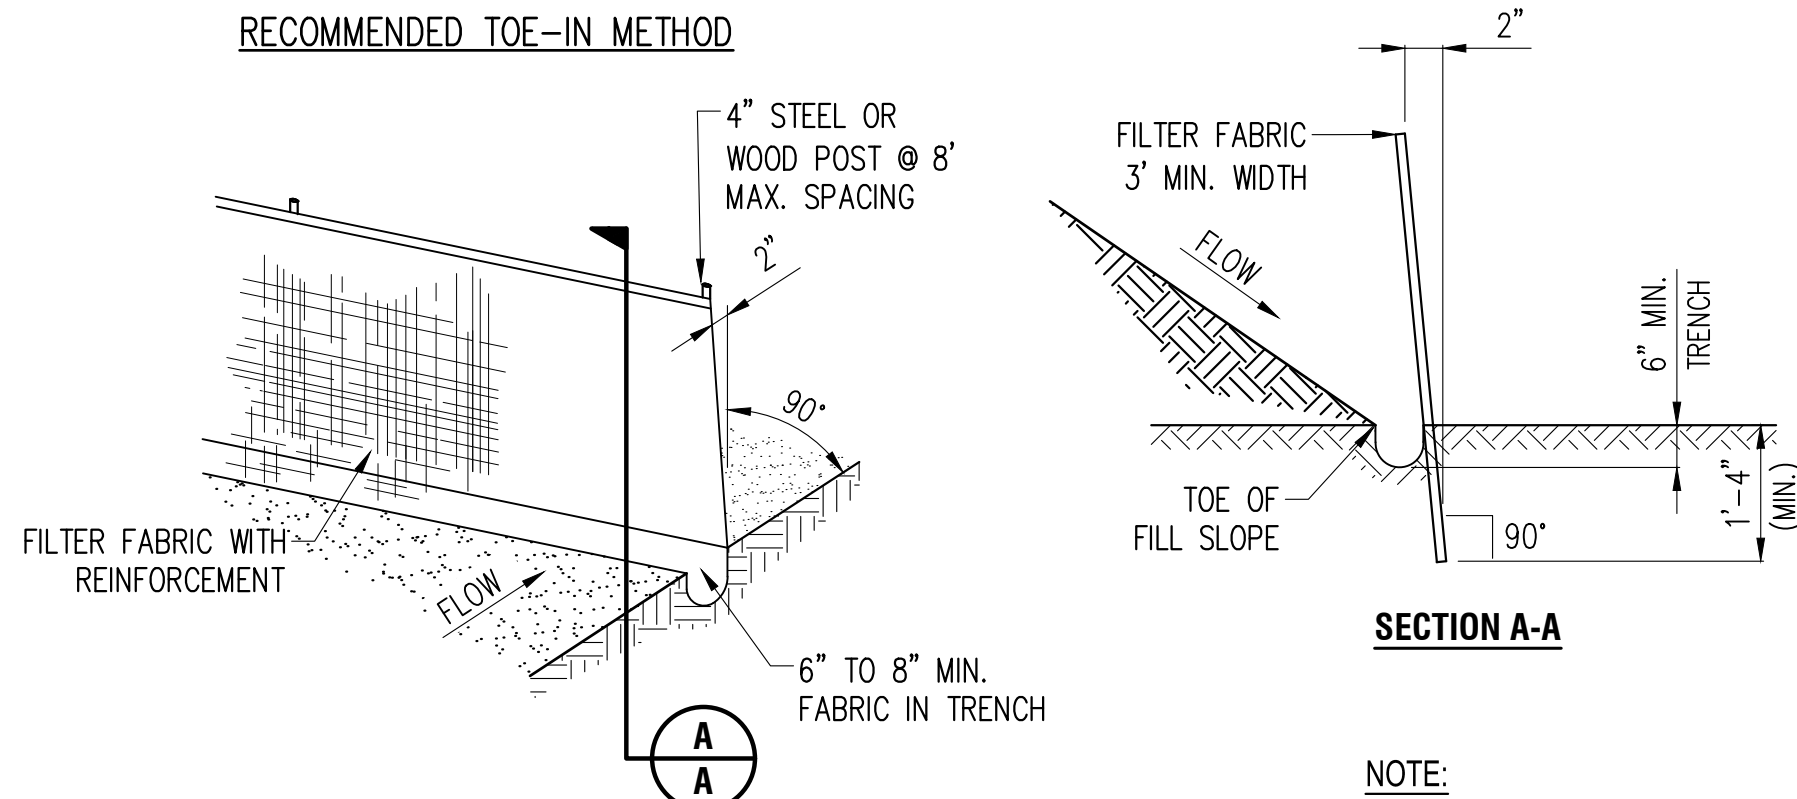

4 SILT FENCE DETAIL
SCALE: N.T.S.
RE: 1/C600

EROSION & SEDIMENT CONTROL NOTES:

- DISTURBED AREAS ON WHICH CONSTRUCTION ACTIVITY HAS CEASED (TEMPORARILY OR PERMANENTLY) SHALL BE STABILIZED WITHIN 14 DAYS UNLESS ACTIVITIES ARE SCHEDULED TO RESUME WITHIN 21 DAYS.

STRUCTURAL PRACTICES:

- HAY BALE FILTERS
- SILT FENCES

MAINTENANCE:

ALL EROSION & SEDIMENT CONTROLS WILL BE MAINTAINED IN GOOD WORKING ORDER. IF A REPAIR IS NECESSARY, IT WILL BE DONE AT THE EARLIEST DATE POSSIBLE BUT NO LATER THAN 7 CALENDAR DAYS AFTER THE SURROUNDING EXPOSED GROUND HAS DRIED SUFFICIENTLY TO PREVENT FURTHER DAMAGE FROM HEAVY EQUIPMENT.

ALL FEATURES OF THE PROJECT DESIGNED & CONSTRUCTED TO PREVENT EROSION AND SEDIMENT SHALL BE MAINTAINED DURING THE LIFE OF THE CONSTRUCTION. MAINTENANCE WILL INCLUDE THE INSPECTION OF EROSION CONTROL FACILITIES. CLEAN, REPAIR AND REPLACE FACILITIES AND OTHER MEASURES IMMEDIATELY AFTER A STORM EVENT OR AS NEEDED.

THIS MAY INCLUDE THE FOLLOWING:

- REGRADE TOP SOIL, AND/OR RESEEDING OF WASHED OUT AREAS.
- REMOVING ACCUMULATION OF SILT FROM ANY FACILITY AFTER STORM EVENTS.
- MAINTAINING ALL SILT FENCES IN AN UPRIGHT & EFFECTIVE POSITION.

WASTE MATERIALS:

ALL WASTE MATERIALS WILL BE COLLECTED AND STORED IN AN APPROPRIATE WASTE CONTAINER IN ACCORDANCE WITH ALL STATE & LOCAL SOLID WASTE MANAGEMENT REGULATIONS. ALL TRASH & CONSTRUCTION DEBRIS FROM THE SITE WILL BE DEPOSITED IN THE CONTAINERS & WILL BE EMPTIED AS NECESSARY OR AS REQUIRED BY LOCAL REGULATION, AND THE TRASH WILL BE HAULED TO A LOCAL DUMP. NO CONSTRUCTION WASTE MATERIAL WILL BE BURIED ON SITE.

HAZARDOUS WASTE (INCLUDING SPILL REPORTING):

AT A MINIMUM, ANY PRODUCTS IN THE FOLLOWING CATEGORIES ARE CONSIDERED TO BE HAZARDOUS: PAINTS, ACIDS FOR CLEANING MASONRY SURFACES, CLEANING SOLVENTS, ASPHALT PRODUCTS, CHEMICAL ADDITIVES FOR SOIL STABILIZATION, OR CONCRETE CURING COMPOUNDS & ADDITIVES, AND EQUIPMENT FUELS & LUBRICANTS IN THE EVENT OF A SPILL WHICH MAY BE HAZARDOUS, THE PROJECT REPRESENTATIVE SHALL BE NOTIFIED IMMEDIATELY.

SANITARY WASTE:

ALL SANITARY WASTE WILL BE COLLECTED FROM THE PORTABLE UNITS AS NECESSARY OR AS REQUIRED BY LOCAL REGULATION BY A LICENSED SANITARY WASTE MANAGEMENT CONTRACTOR.


OFFSITE VEHICLE TRACKING:

- LOADED HAUL TRUCKS TO BE COVERED WITH TARPULIN.

Consultant

Design Phase Acceptance

Permit/Seal

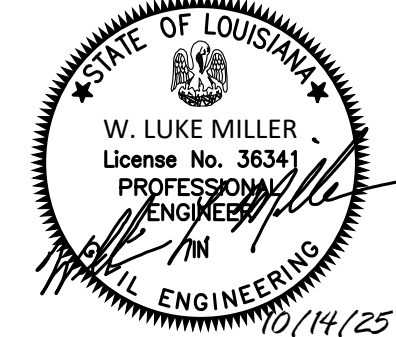

Client/Project
CITY OF NATCHITOCHE
NEW FIRE STATION NO. 3
NATCHITOCHE, LOUISIANA

Project No.: 222706059
File Name: 7824_SITE_PLAN
Scale: 1" = 30'-0"
Dwn. Dgn. Chkd. YYYY.MM.DD
Title: SWPP PLAN & DETAILS



PROJ. NO. **7824** DATE: **7/11/25**
DESIGN: **WLM** DRAWN: **GO**

Revision: Sheet: of
Drawing No. **C600**

Stantec
Stantec [Formerly Bradley-Blevins & Associates]
1200 Bickyard Lane, Suite 400
Baton Rouge, LA 70802
Tel: 225-765-7400
www.stantec.com
Copyright Reserved
The Contractor shall verify and be responsible for all dimensions. DO NOT scale the drawings. The Contractor shall verify and be responsible for all dimensions. DO NOT scale the drawings. The Contractor shall verify and be responsible for all dimensions. DO NOT scale the drawings.