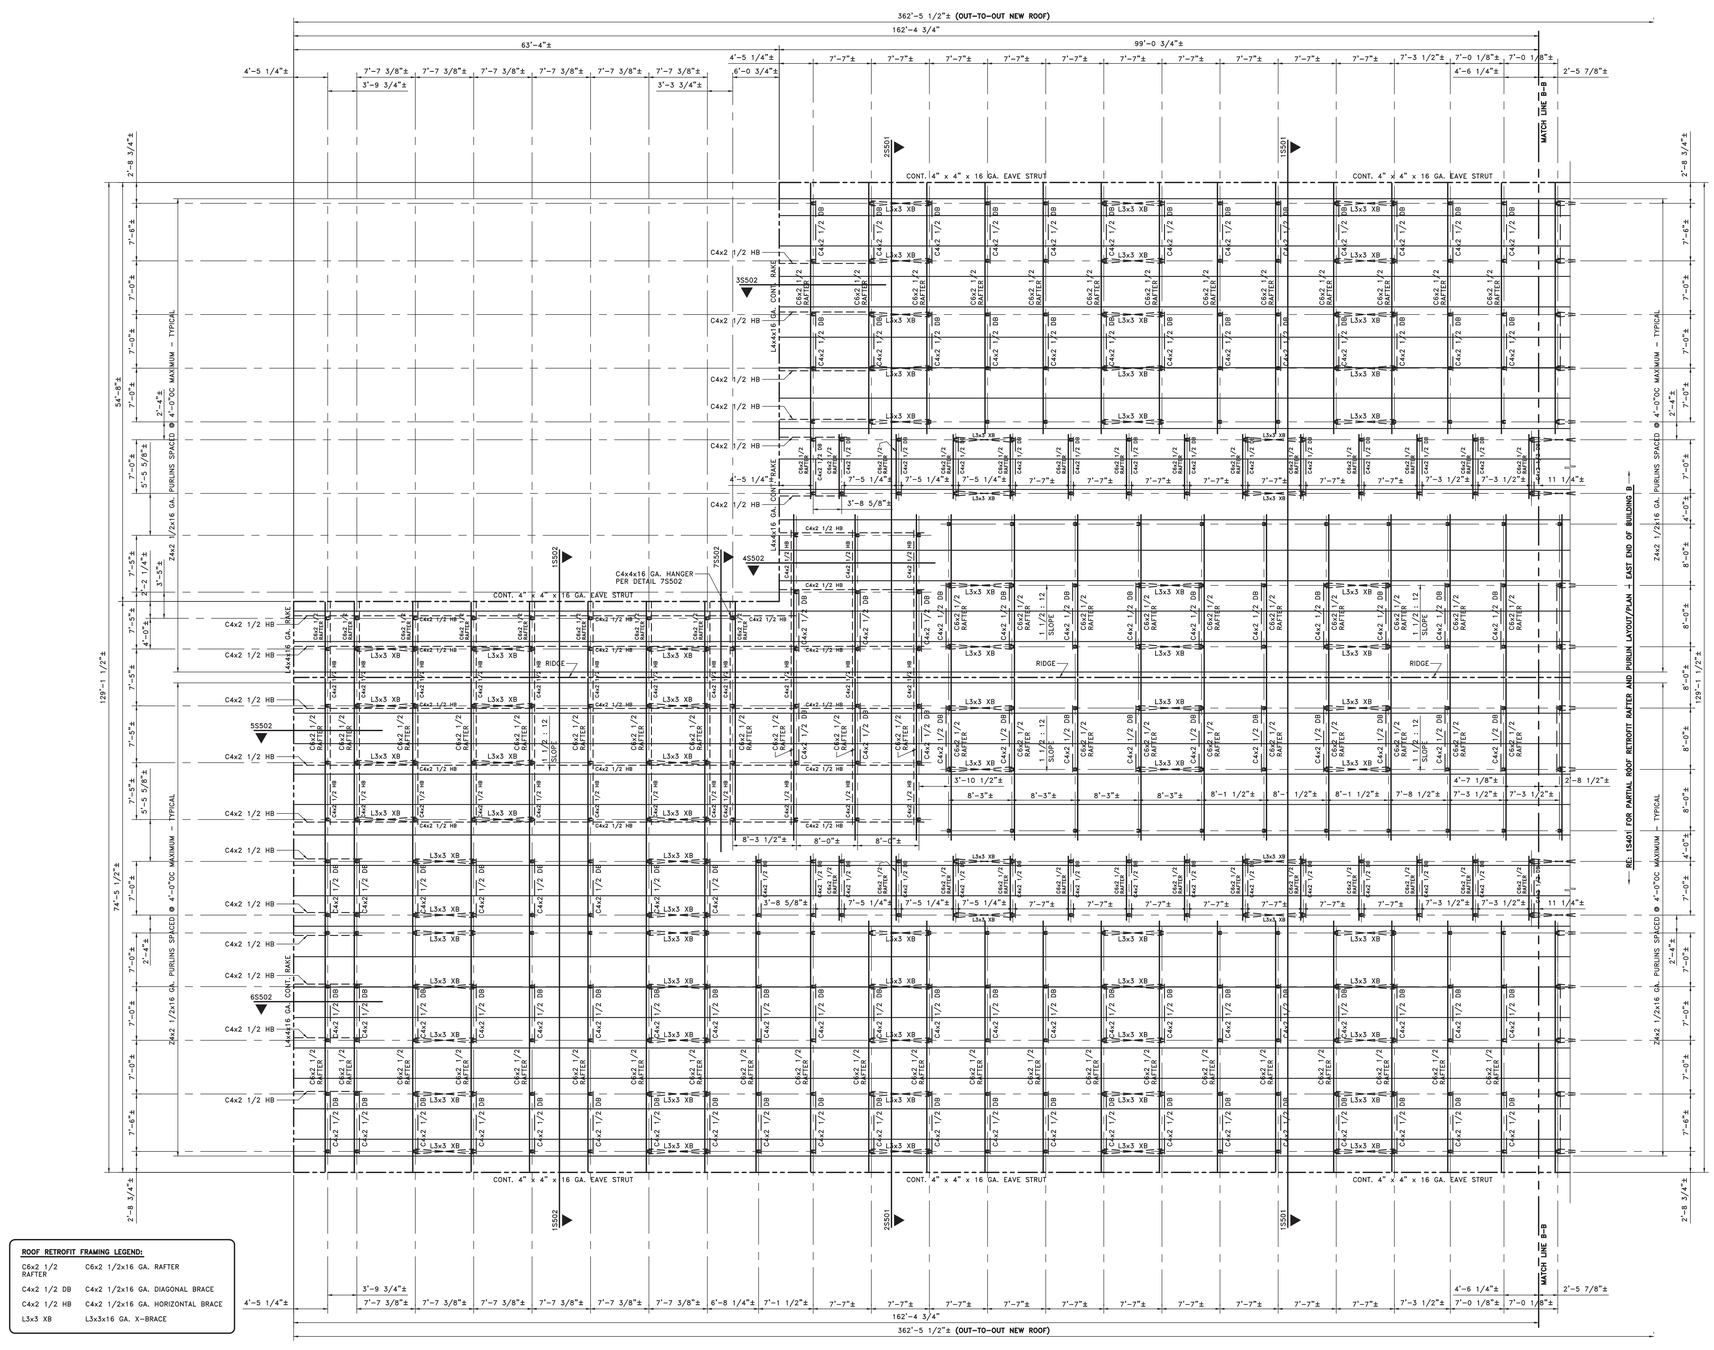

ROOF RETROFIT FRAMING LEGEND:

C6x2 1/2 RAFTER	C6x2 1/2x16 GA. RAFTER
C4x2 1/2 DB	C4x2 1/2x16 GA. DIAGONAL BRACE
C4x2 1/2 HB	C4x2 1/2x16 GA. HORIZONTAL BRACE
L3x3 XB	L3x3x16 GA. X-BRACE

1 PARTIAL ROOF RETROFIT RAFTER AND PURLIN LAYOUT/PLAN – BUILDING A AND WEST END OF BUILDING B

1/8" = 1'-0"

RE: 1S100, ARCHITECTURAL, MECHANICAL, ELECTRICAL DRAWINGS, GENERAL STRUCTURAL NOTES

REFER TO STANDARD DRAWINGS, DETAILS AND SCHEDULES IN PROJECT MANUAL.

YEAGER, WATSON & ASSOCIATES, INC.
AN ARCHITECTURAL CORPORATION
118 SOUTH TRENTON STREET
RUSTON, LOUISIANA 71270-5432
TELEPHONE: (318) 202-5708

IMPROVEMENTS TO J.I. BARRON ELEMENTARY SCHOOL

Owner : Rapides Parish School Board

Pineville, Louisiana

PINEVILLE, LA

PARTIAL ROOF RETROFIT RAFTER AND PURLIN LAYOUT/PLAN - BUILDING A AND WEST END OF BUILDING B

DATE: SEPTEMBER 2025

REVISIONS:

JOB NUMBER: 2025-02

STATE OF LOUISIANA
MICHAEL B. FERGUS
REG. No. 23635
REGISTERED
PROFESSIONAL ENGINEER
IN
CIVIL ENGINEERING
9-24-25

FERGUS ENGINEERING
CONSULTING STRUCTURE, INC.
1058 INCA DRIVE
LARAMIE, WY 82072
(970) 817-4600
www.fergusengineering.com

S400 OF 135